
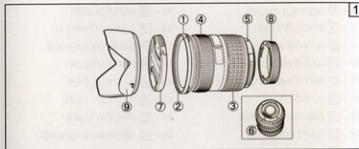


OLYMPUS
ZUIKO DIGITAL
14-54mm f2.8-3.5 II
4 - **EN** INSTRUCTIONS6 - **BG** ИНСТРУКЦИИ8 - **GR** ΝΑΥΟΔ Κ ΡΟΤΖΙΤΙ10 - **DE** BEDIENUNGSANLEITUNG12 - **DK** BETJENINGSVEJLEDNING14 - **EE** JUHISED16 - **ES** INSTRUCCIONES18 - **FI** KÄYTTÖOHJEET20 - **FR** MODE D'EMPLOI22 - **GR** ΟΔΗΓΙΕΣ24 - **HR** UPUTE26 - **HU** HASZNÁLATI ÚTMUTATÓ28 - **IT** ISTRUZIONI30 - **LT** INSTRUKCIJA32 - **LV** NORĀDĪJUMI34 - **NL** AANWIJZINGEN36 - **NO** INSTRUKSJONER38 - **PL** INSTRUKCJA40 - **PT** INSTRUÇÕES42 - **RO** INSTRUCȚIUNI44 - **RU** ИНСТРУКЦИЯ46 - **SE** BRUKSANVISNING48 - **SI** NAVODILA50 - **SK** NÁVOD NA POUŽITIE52 - **SR** UPUTSTVO ZA UPOTREBU54 - **TR** TALİMATLAR56 - **UA** ІНСТРУКЦІЯ58 - **AR** الإرشادات**EN INSTRUCTIONS**

Thank you for purchasing this Olympus product. To ensure your safety, please read this instruction manual before use, and keep it handy for future reference.

Name of parts (Fig. 1)

- ① Hood mount section,
- ② Filter mount thread,
- ③ Zoom ring,
- ④ Focus ring,
- ⑤ Mount index,
- ⑥ Electrical contacts,
- ⑦ Front cap,
- ⑧ Rear cap,
- ⑨ Lens hood

Attaching the hood (Fig. 2)**Storing the hood (Fig. 3)****Notes on Shooting**

- Use the hood when shooting a backlit subject.
- Edges of pictures may be cut off if more than one filter is used or if a thick filter is used.
- Can be used with the optional EC-14 teleconverter.
- The optional EC-20 teleconverter allows for focusing using AF at the center AF target.
- Can be used with the optional EX-25 extension tube under the following conditions.

Focal length	Focus adjustment	Working distance	Magnification (x): When converted to 35 mm film camera
54 mm	MF	17.7 – 22.2 cm (7.0 in – 8.7 in)	0.47 – 0.66x (0.94 – 1.32x)

- When using E-300, make sure that the camera firmware is version 1.3 or higher.

Main Specifications

- Mount : Four Thirds Mount
- Focal distance : 14 – 54 mm (0.6 – 2.1 in) (equivalent to 28 to 108 mm on a 35 mm camera)
- Max. aperture : f2.8 – 3.5
- Image angle : 75° – 23°

Lens configuration : 11 groups, 15 lenses

Multilayer film coating (partially single layered)

Iris control : f2.8 to f22

Shooting range : 0.22 m (0.7 ft) to ∞ (infinite)

Focus adjustment : AF/MF switching

Weight : 440 g (15.5 oz)

 Dimensions : Max. dia. \varnothing 74.5 (2.9 in) × Overall length 88.5 mm (3.5 in)

Lens hood mount : Bayonet

Filter mount

thread diameter : 67 mm (2.6 in)

- Specifications are subject to change without any notice or obligation on the part of the manufacturer.

For customers in Europe

The "CE" mark indicates that this product complies with the European requirements for safety, health, environment and customer protection. CE-mark products are for sale in Europe.

Precautions: Be Sure to Read the Following**Warnings: Safety Precautions**

- Do not view the sun through the lens. It may cause blindness or vision impairment.
- Do not leave the lens without the cap. If sole light is converged through the lens, a fire may result.
- Do not point the camera lens at the sun. Sunlight will converge in the lens and focus inside the camera, possibly causing a malfunction or fire.

European Technical Customer Support

Please visit our homepage
<http://www.olympus-europa.com>
 or call: Tel. 00800 - 67 10 83 00 (Toll-free)
 +49 180 5 - 67 10 83 or
 +49 40 - 237 73 48 99 (Charged)